


CIS

NP – Flat Conveyor

Standard horizontal conveying – the most universal DMD type

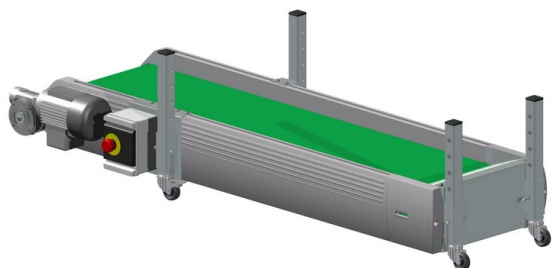

Characteristics

Type code	NP
Layout	Horizontal
Mobility	On wheels or adjustable feet
Belt surface	Smooth PU, PU supergrip, heat-resistant
Sectors	Plastics processing, recycling
Manufacturing	Custom-sized, to customer specification

Typical applications

- ▶ Under / beside an injection moulding or blow moulding machine – for discharging finished parts
- ▶ With a heat-resistant belt: even the hot sprues of rubber and thermoset materials cause no damage
- ▶ As a collection conveyor combined with a sprue granulator

Why choose it?

- ✓ The simplest DMD type – minimal investment, fast payback
- ✓ Slides directly under / beside the machine – no need to rearrange the cell
- ✓ Heat-resistant belt option: can also be used with rubber and thermoset materials
- ✓ Built to custom size – fits the machine dimensions exactly

Cyber in Systems Kft.

Exclusive DMD representative
4183 Kaba, Baross Gábor utca 46.

info@cyberin.hu | www.cyberin.hu

Quotation for custom sizes – based on a machine drawing or photo

Lead time: 4–8 weeks